


TaixinKingdom[®]

Thank you very much for purchasing Taixin-Taixinkingdom series products.

The following are pictures of series products(For some Mobile DVR pictures and all products, please see Taixin price catalogue):




1. Power supply cord (TX-1 series , TX-4 series , TX-8 series) (8V-36V)



- 1:GND
- 2:Positive pole
- 3:ACC
- 4:NC

2. Power supply cord (TX-2 series , TX-3 series , TX-5 series, TX-9 series) (8V-36V)

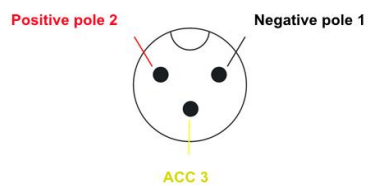

- 1:GND
- 2:Positive pole
- 3:ACC



Bus/Truck/Car: Red + (Positive pole)

Yellow (ACC)

Black - (Negative pole)

Office (8V-36V: Current above 3A) : Red & Yellow+ (Positive pole)
Black - (Negative pole)

2.I/O: Interface definition



TX-2 series , TX-8 series

Pin	Definition	Pin	Definition
1	RS232-TX(Special customization)	2	RS232-RX(Special customization)
3		4	
5	Alarm In 4	6	Alarm In 3
7	Alarm In 2	8	Alarm In 1
9	Alarm Output 2	10	Alarm Output 1
11	+12V	12	GND


TX-1 series, TX-3 series , TX-9 series


Pin	Definition	Pin	Definition
1		2	
3	RS232-TX(Special customization)	4	RS232-RX(Special customization)
5	Alarm In 4	6	Alarm In 3
7	Alarm In 2	8	Alarm In 1
9	Alarm Output 2	10	Alarm Output 1
11	+12V	12	GND

3. Aviation interface definition



4.

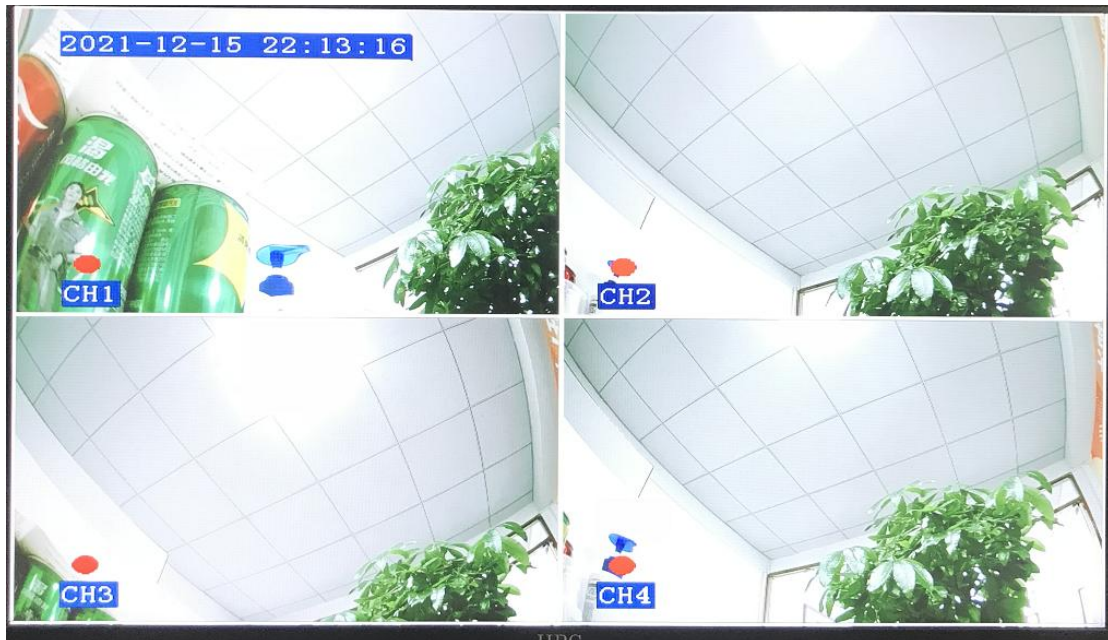

 : Red dot = The video is normal



5.Remote control



 LOGIN	Press the logn key to directly log in to the main page (main menu interface operation)
【0—9】 number key	【0—9】 key: In the setting state, the number input key is used to select numbers. During playback, keys 1, 2, 3 and 4 are used to switch to 1-4 channel single screen
 DEC	Delete key to delete characters back when editing.
	Under the monitoring screen, it is used for switching between four screens and single screen; Press the "Tian" key to display 4 screen; Press the number keys 1, 2, 3 and 4 to switch to single screen ch1, CH2, CH3 and CH4
	Direction key, up, down, left and right cursor direction movement keys.
 EXIT	Return to the previous submenu. Return key
	Fast forward key for playback of video files (or switch key required for text input)
 REW	Rewind key when playing back image files (or switch key when inputting text)
 STOP	Stop manual recording key
 PAUSE/STEPP AUSE/STEP	Pause playback and frame playback key during playback of video data (frame playback: play a single picture, press this key once to play the next picture), and press the play image key to return to the normal playback speed
	Directly enter the playback interface, select the time point of the video file to play



[6.The menu interface of the machine is different for each machine, but the basic use method is the same](#)



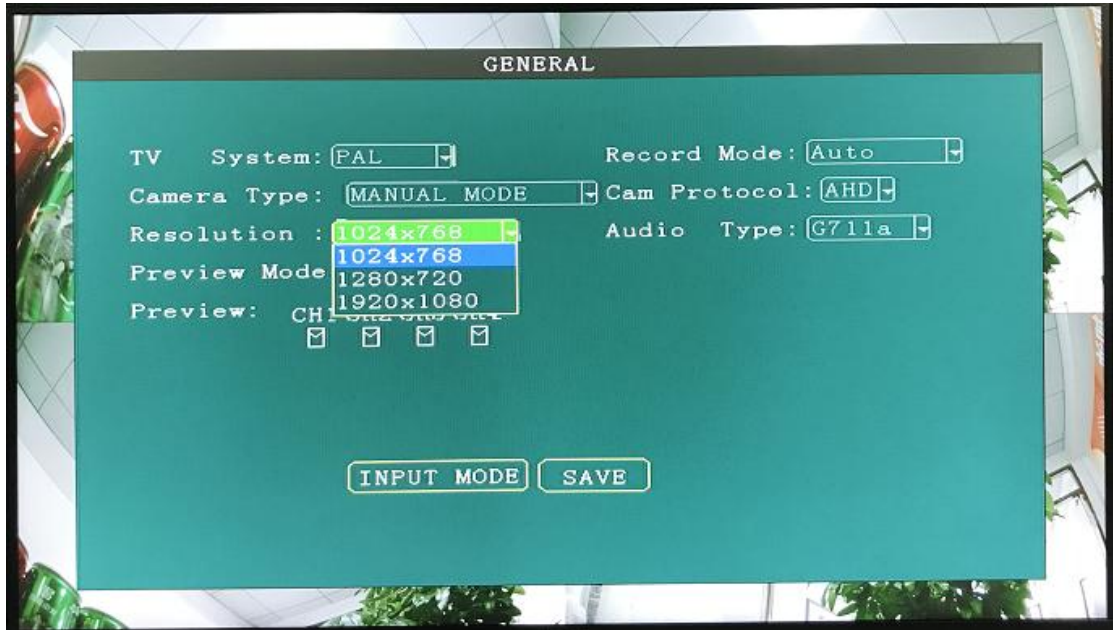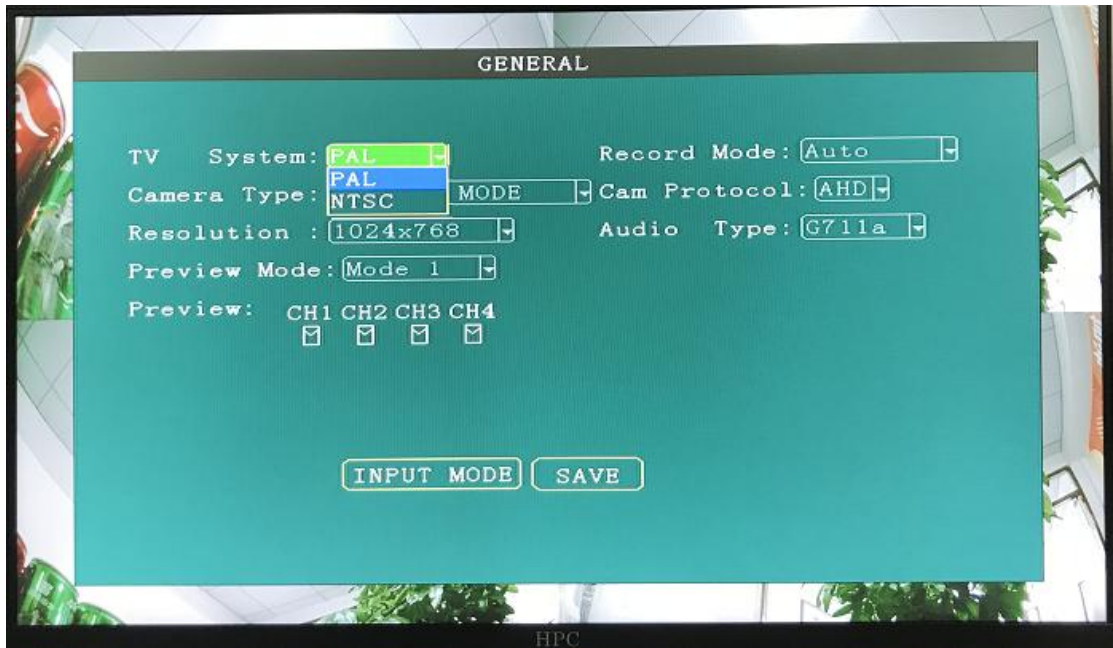

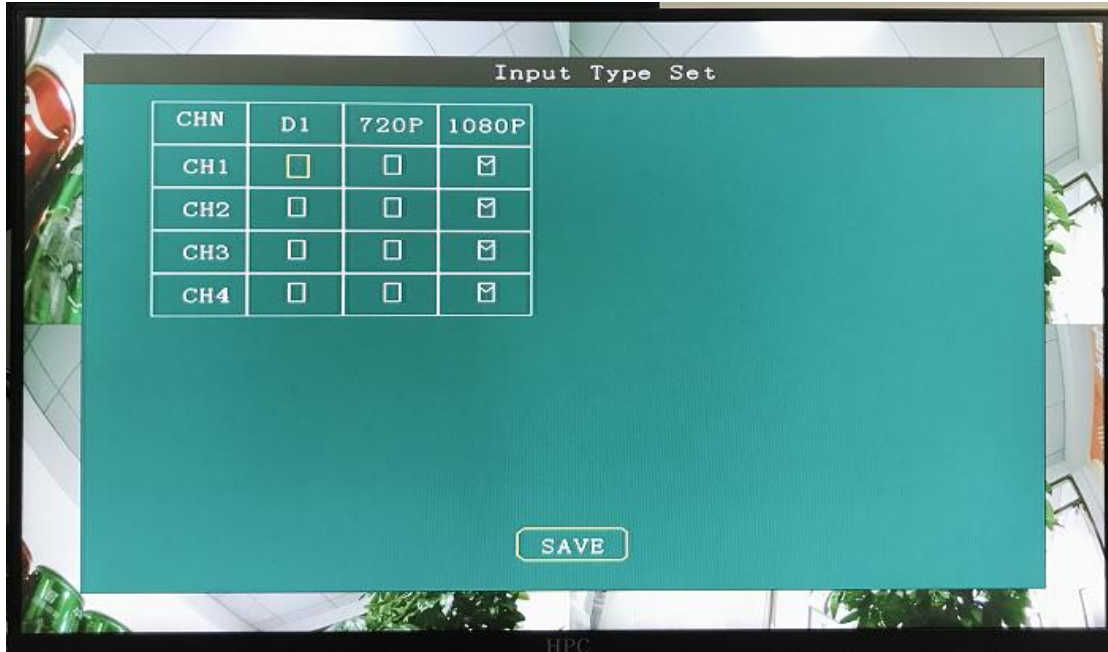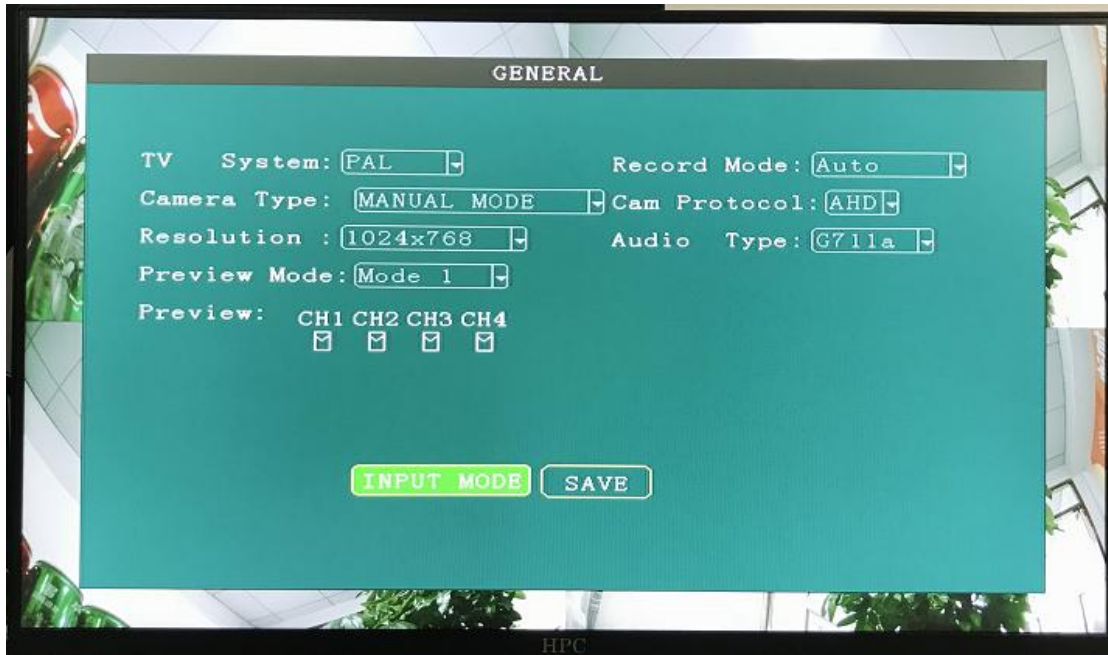

MAIN MENU - RECORD SETUP - RECORD -



PAL: PAL Camera

NTSC: NTSC Camera

INPUT MODE

CHN	D1	720P	1080P
CH1	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
CH2	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
CH3	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
CH4	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>

D1: 960H , D1 , Analog , 1200tvl , 800tvl, 700tvl , 600tvl ,480tvl ,420tvl camera.....

720P: 720P , 960P camera

1080P: 1080P camera

(English machines: Some machines have automatic recognition function)

7.



WIFI antenna



4G antenna

GPS antenna

Antenna = must be inserted

4G&GPS : Must be outside or near the window



8.

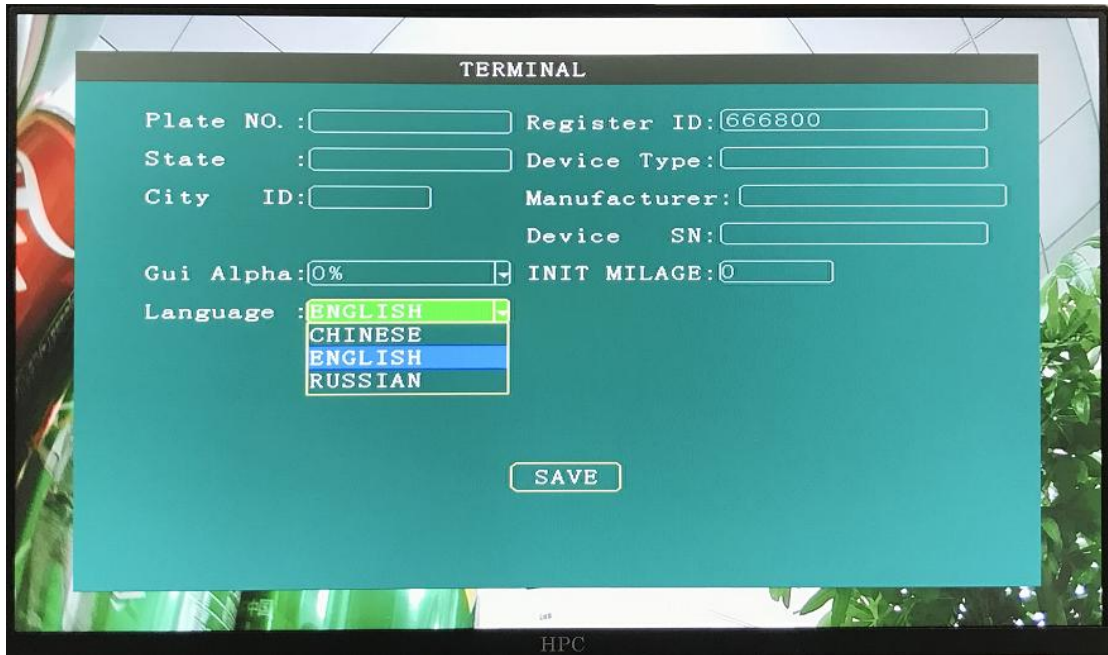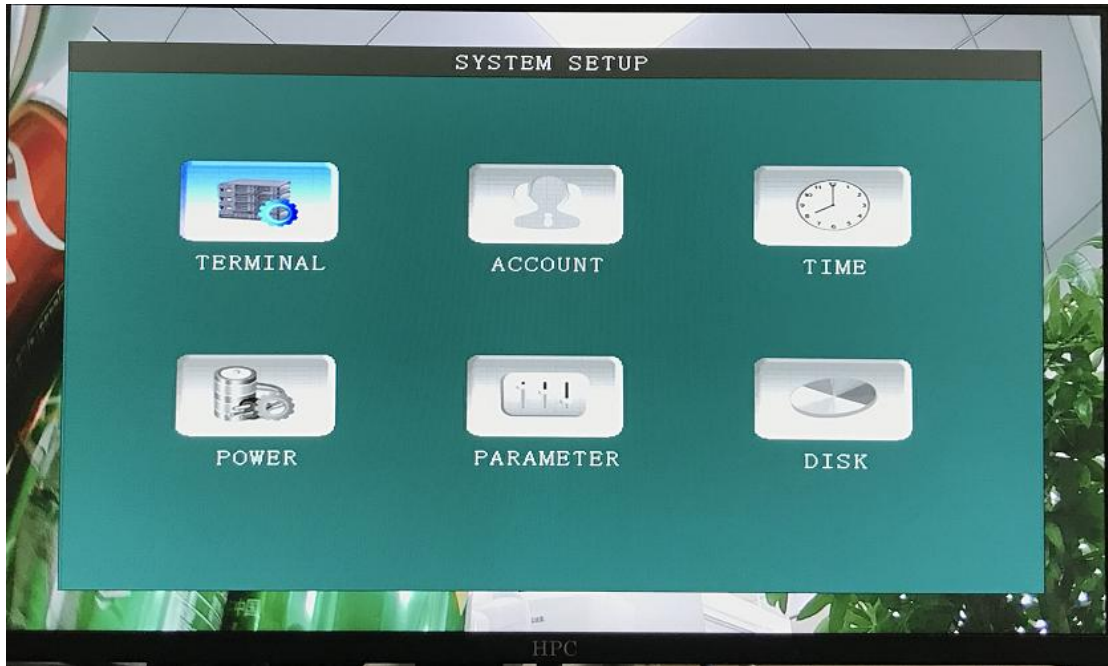


Register ID: Cannot be modified

Language: English, Korean, Russian, or custom language

9.

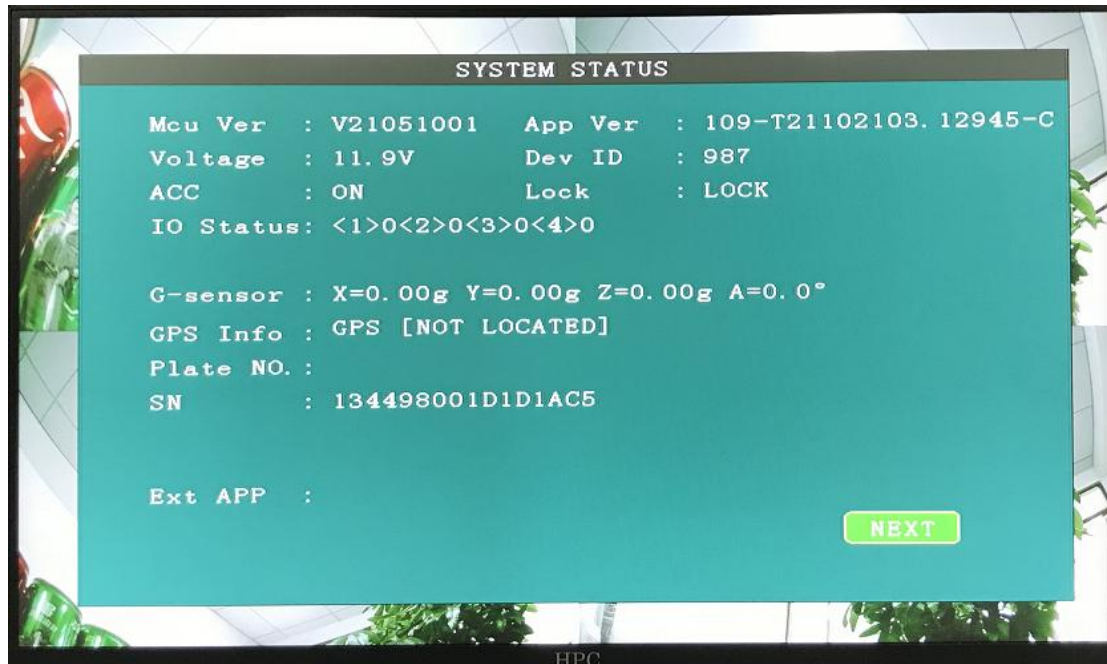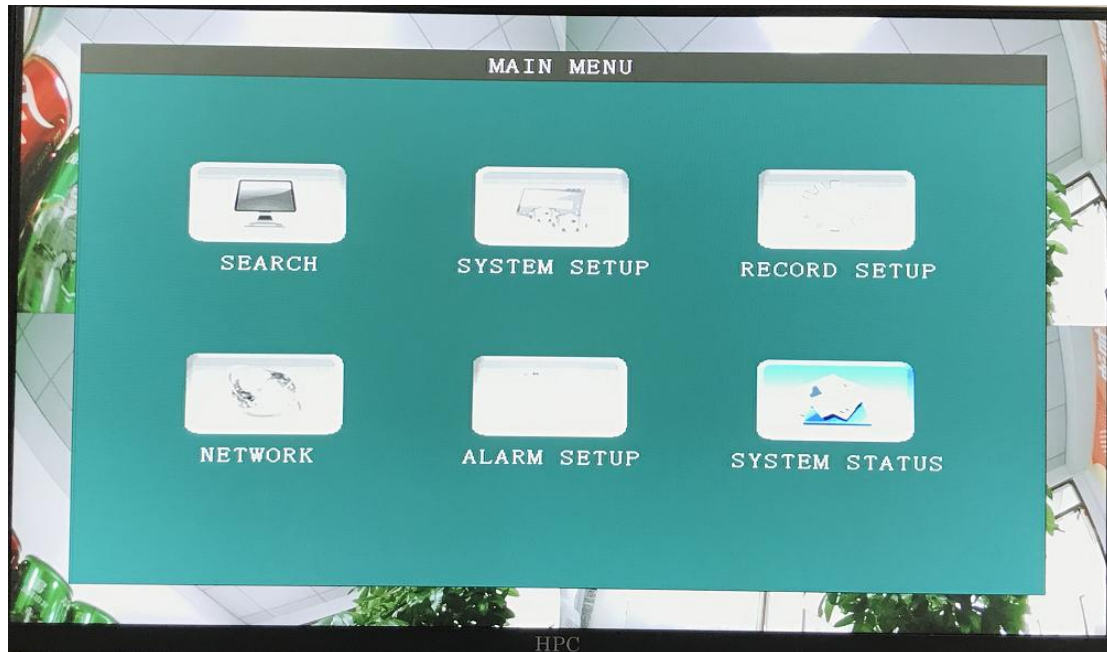

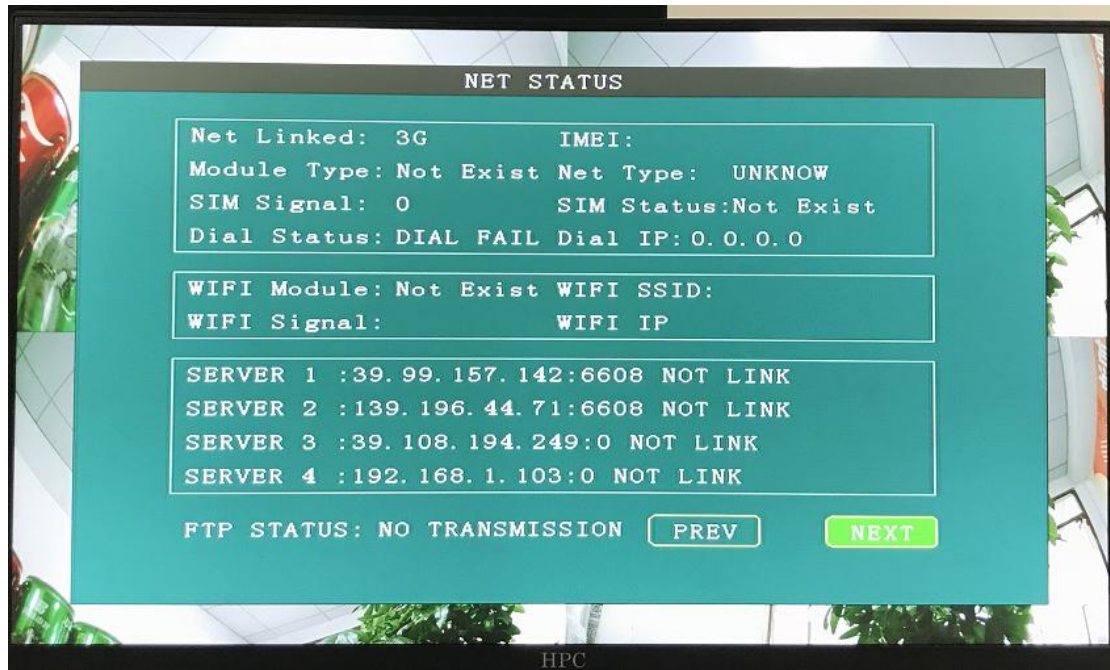

Usually online:

Net Linked: 3G

It should be 4G

Dial IP: 0.0.0.0

Dial IP: There are numbers


SERVER 1 :39.99.157.142:6608 NOT LINK


Usually we are SERVER 1: www.taixinkingdom.com :6608

Usually we are SERVER 2: www.taixinkingdom.com :6608


Usually we are SERVER 3: www.taixinkingdom.com :6608


Usually we are SERVER 4: www.taixinkingdom.com :6608

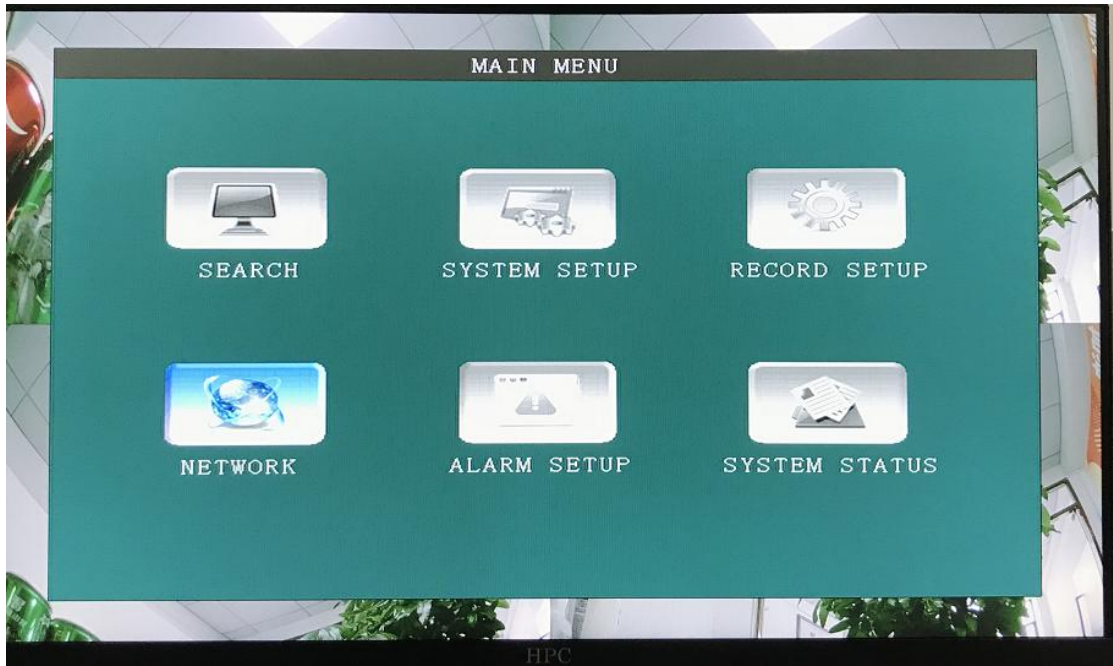

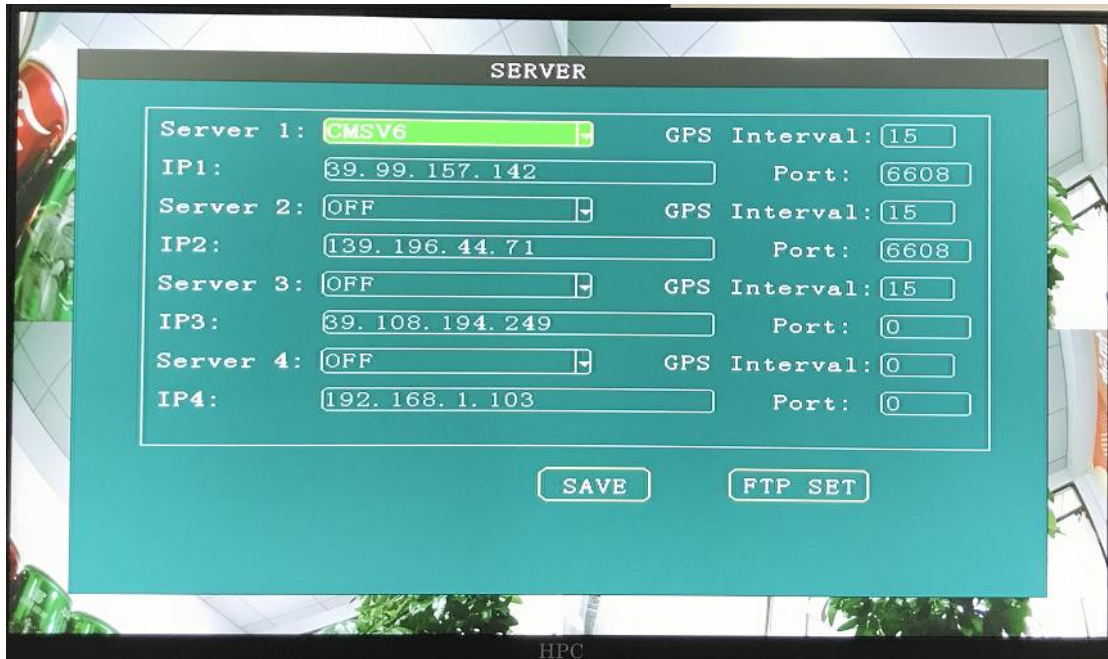

Usually we are SERVER 1: www.taixinkingdom.com Port: 6608
Usually we are SERVER 2: www.taixinkingdom.com Port: 6608
Usually we are SERVER 3: www.taixinkingdom.com Port: 6608
Usually we are SERVER 4: www.taixinkingdom.com Port: 6608

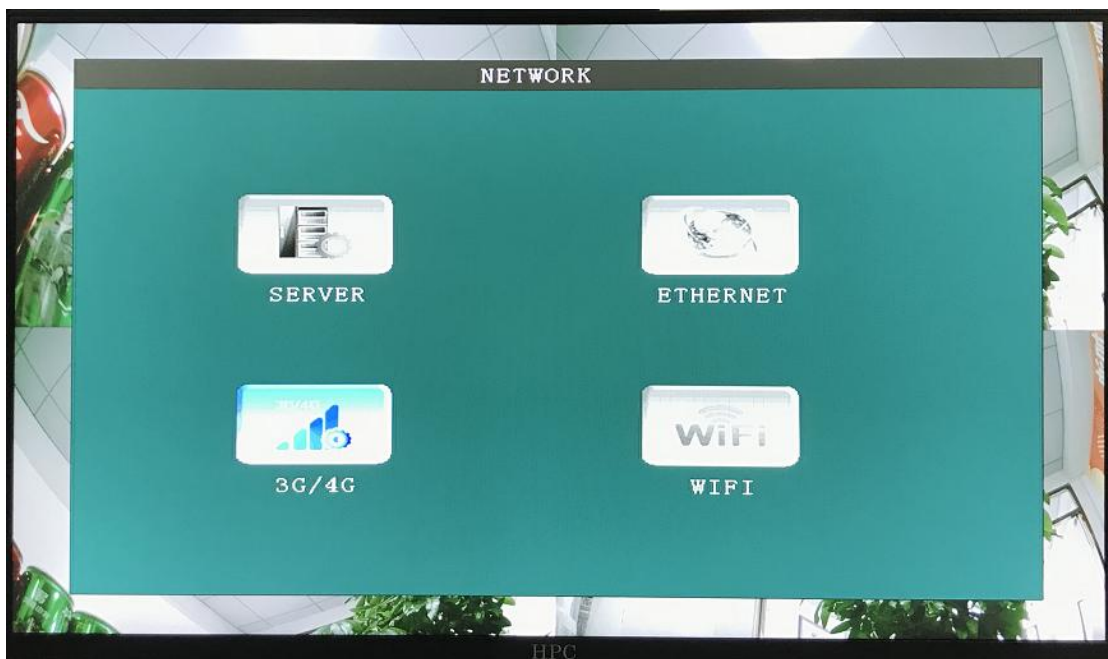

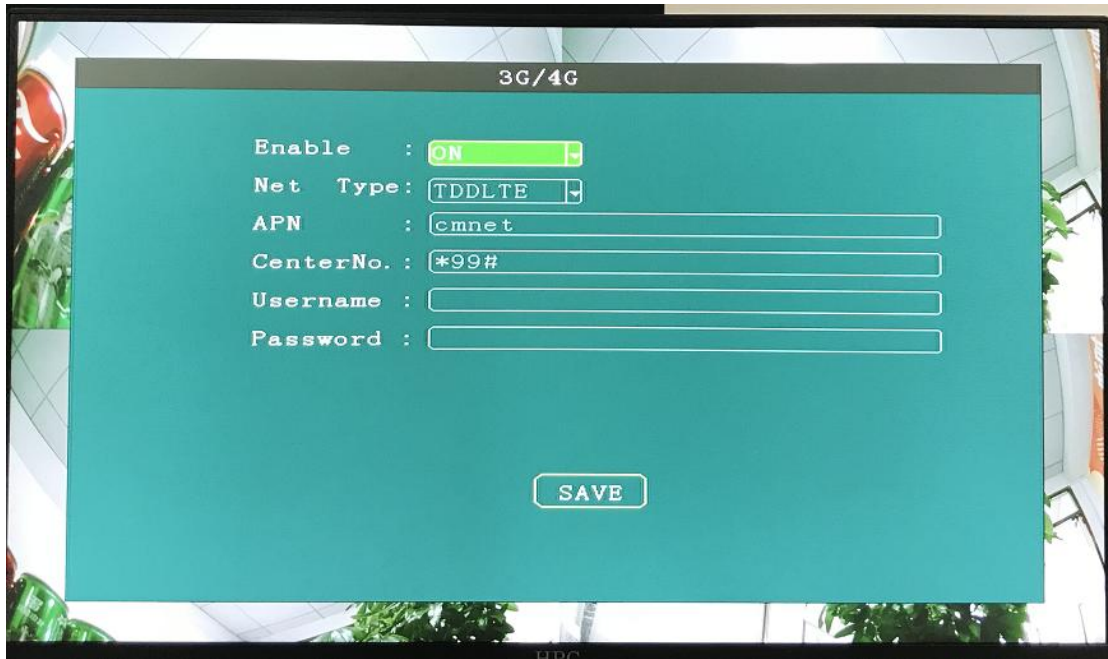






Usually we are SERVER 1: www.taixinkingdom.com :6608


3G/4G = If the machine is already online, please do not modify it

CMSV6 & CMSV7 : 222.89.70.48

Enter the web address and download the computer client

Windows Version  Download Version:7.24.0.1 Update:20201030	IOS Version  Download Version:1.3.2 Update:20201028	Android Version  Download Version:6.0.0.40 Update:20201028
Playback  Download Version:7.24.0.1 Update:20201029	MapInfo Plug-in  Download Version:5.0 Update:20140815	

If you need a mobile phone, download the software on the mobile phone and input the search software directly: CMSV7

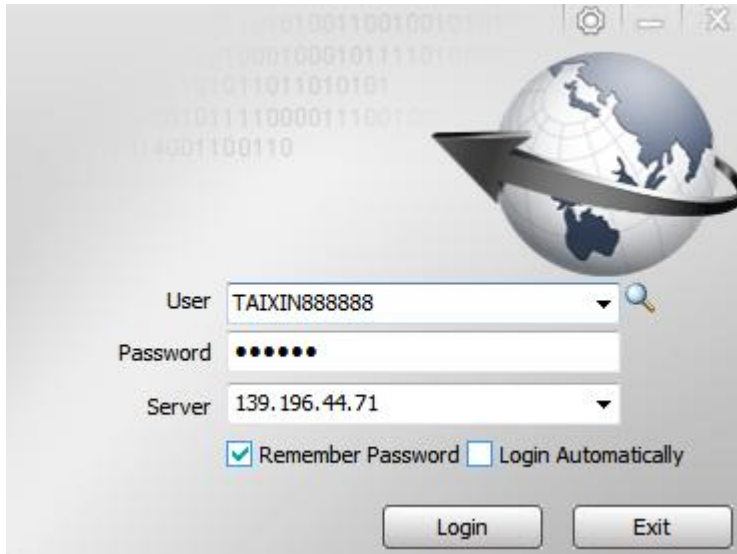


User

Password

Server

Usually: we will label it on the machine

10.


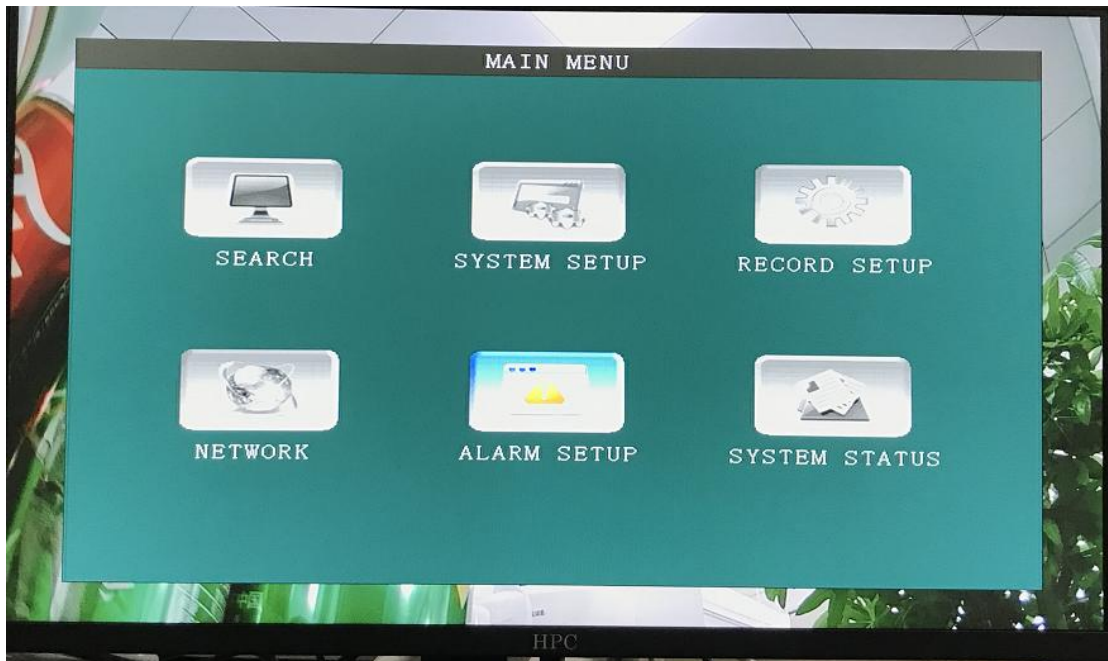





AL1-AL4 cables & IN1-IN4 & CAM1-CAM4: correspond

Connect the relative trigger line + set the corresponding menu

11.

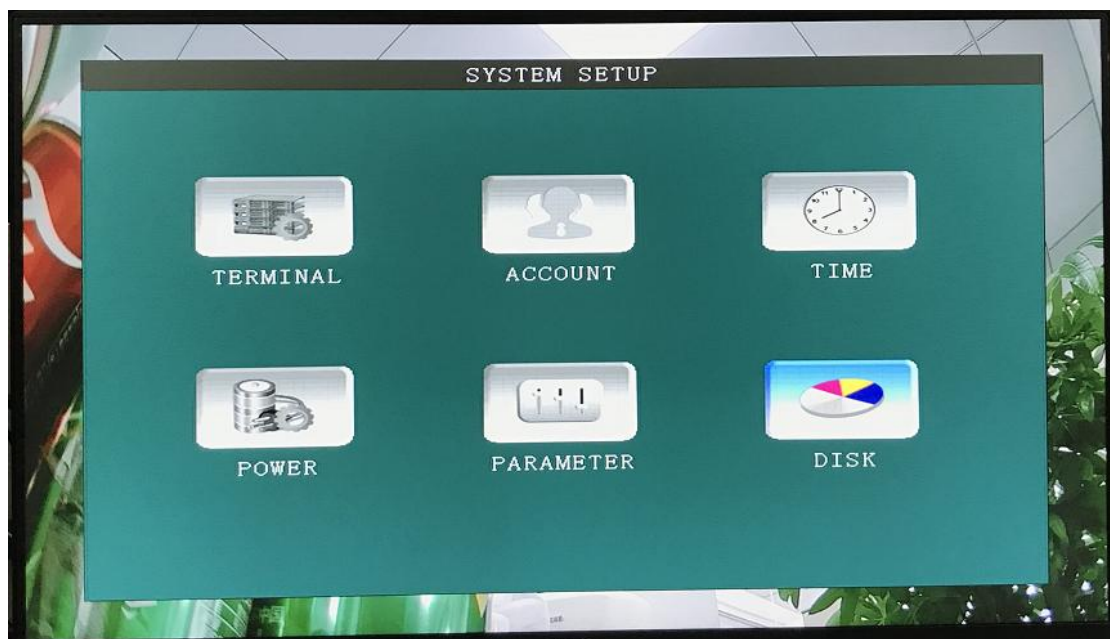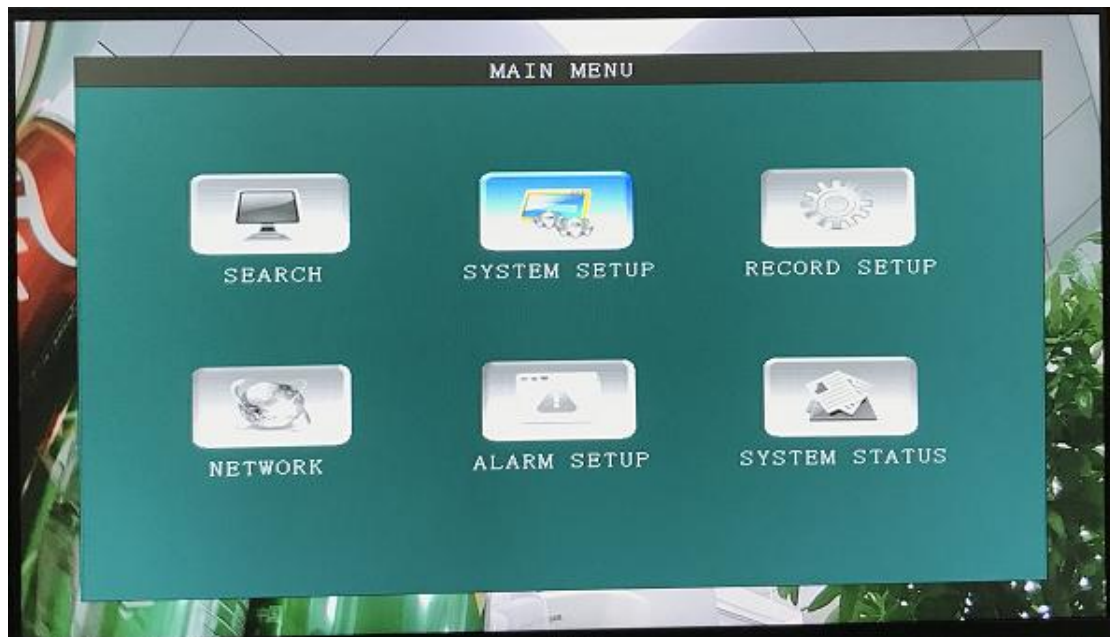

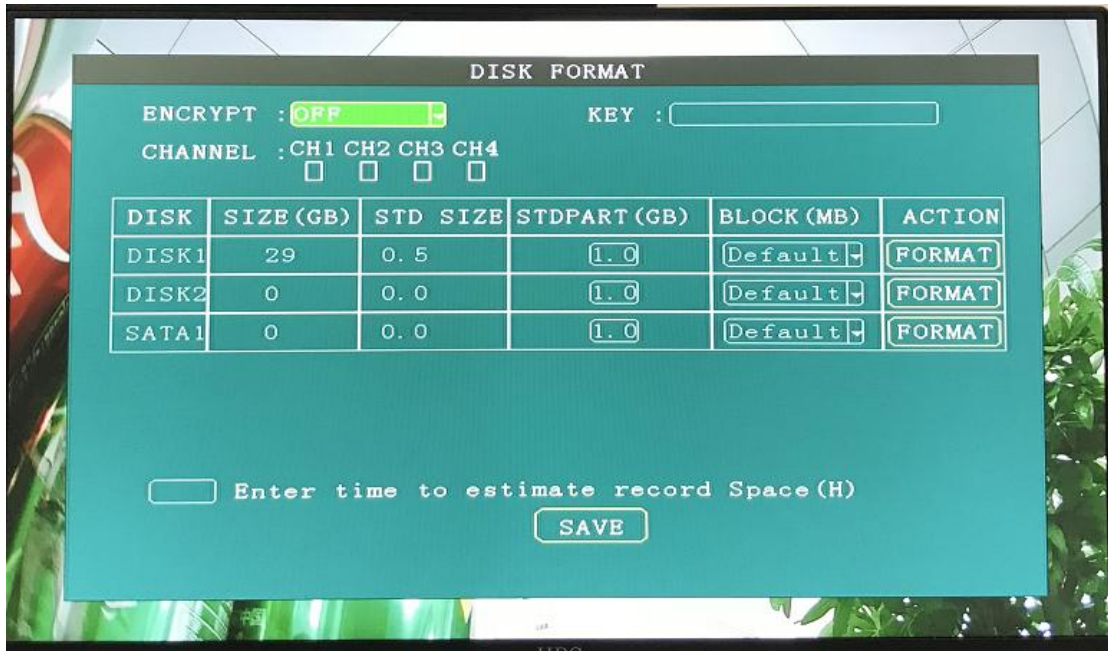


MAIN MENU -SYSTEM SETUP -DISK :

Check the Hard Disk or SD card to ensure that it is genuine and high-speed

1. TF ferrule SD ferrule is not supported
2. If the hard disk or SD card mdvr cannot be confirmed, please put it into your computer to format and see the capacity

12.

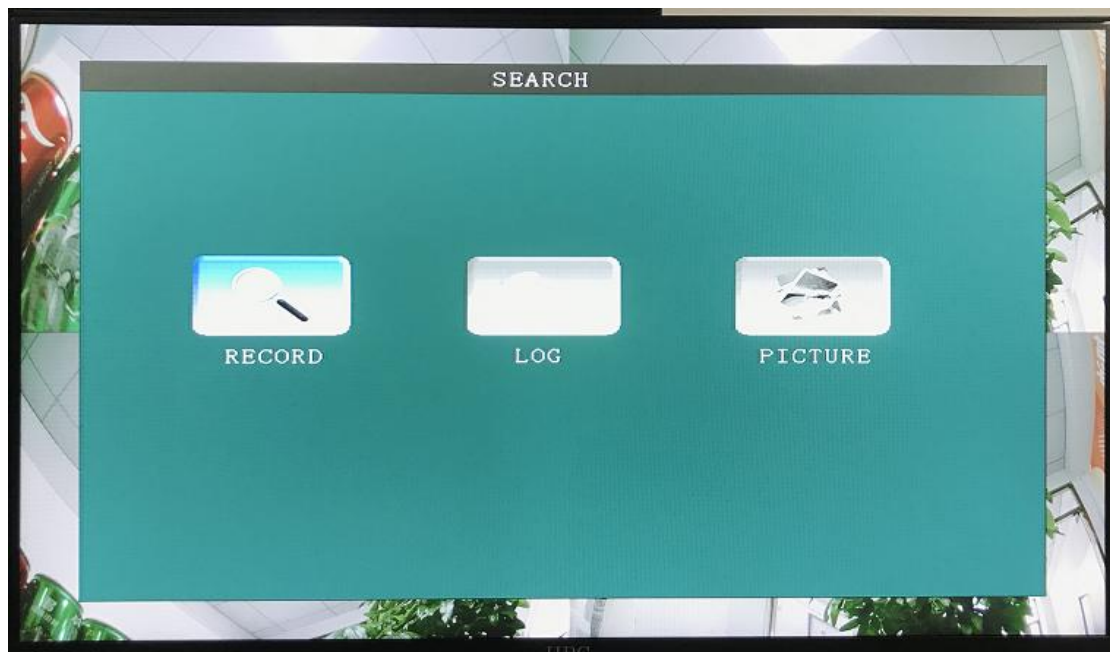






MAIN MENU - SEARCH - RECORD -AUDIO/VIDEO

: View and playback or export video

1. If the exported video is incorrect, please check whether it is recorded correctly or recorded correctly. If it is recorded correctly, check whether the SD card, hard disk or USB flash disk see that the capacity is in Mobile DVR
- 2.



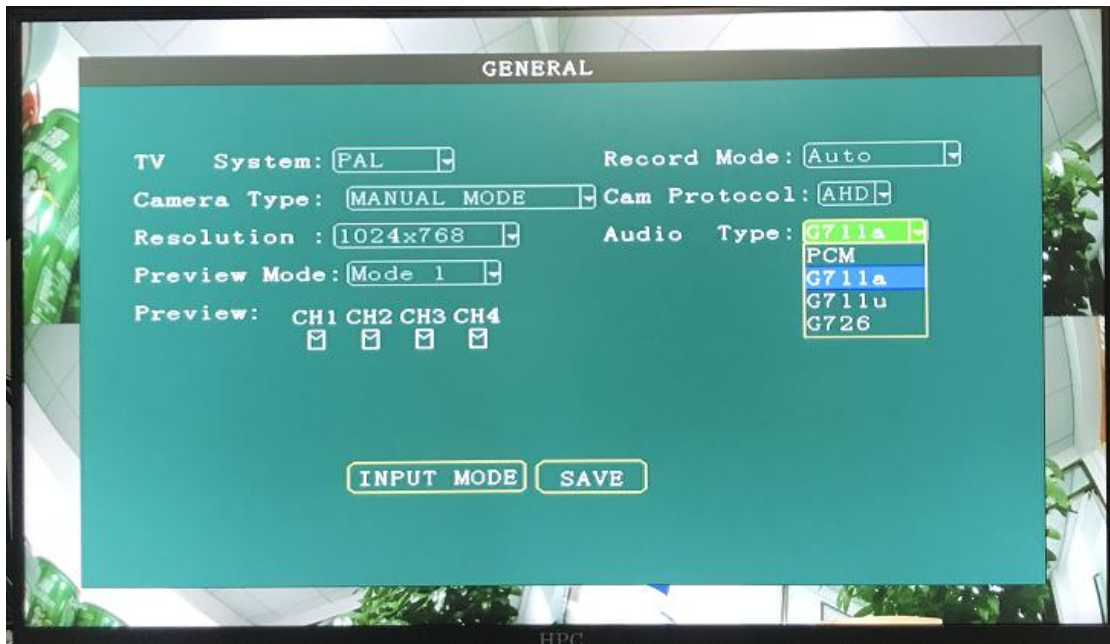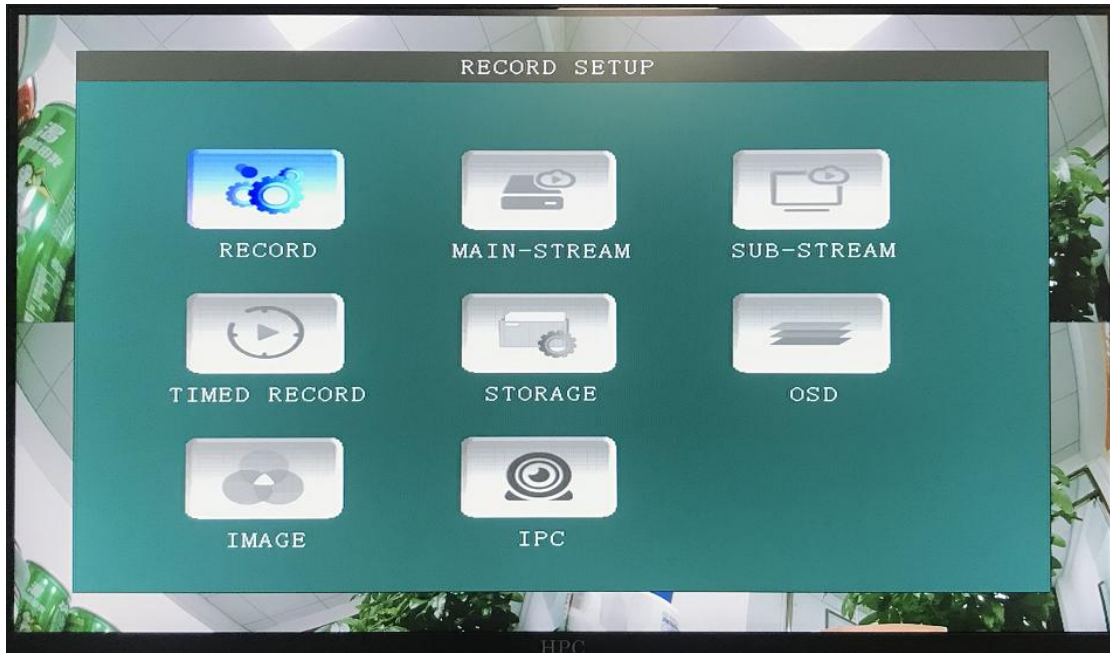

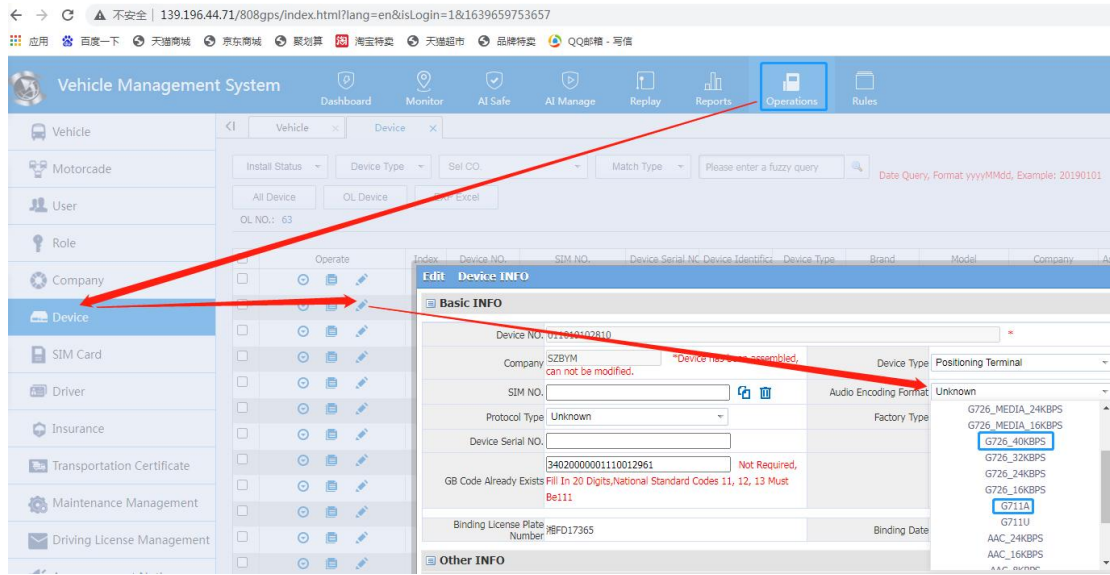


Audio Type: choose


TX-1,2,3,5,8 series: G726

TX-9 series: G711a

MDVRPlayer_WIN_7.7.1.42_20210722

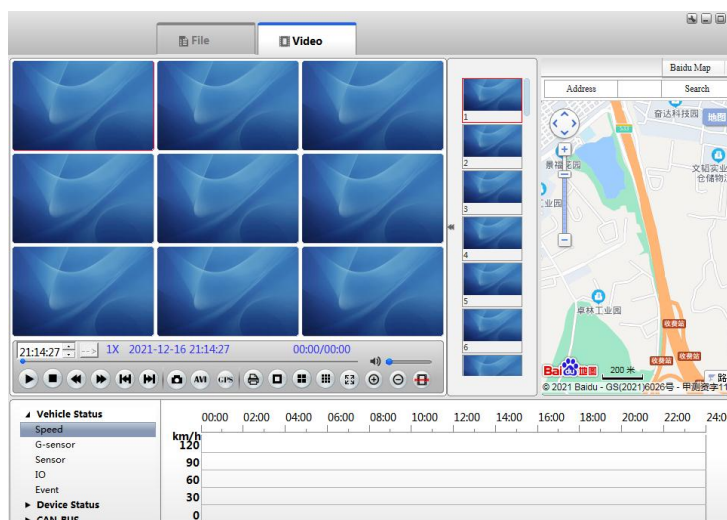

MDVRPlayer : Watch video and sound

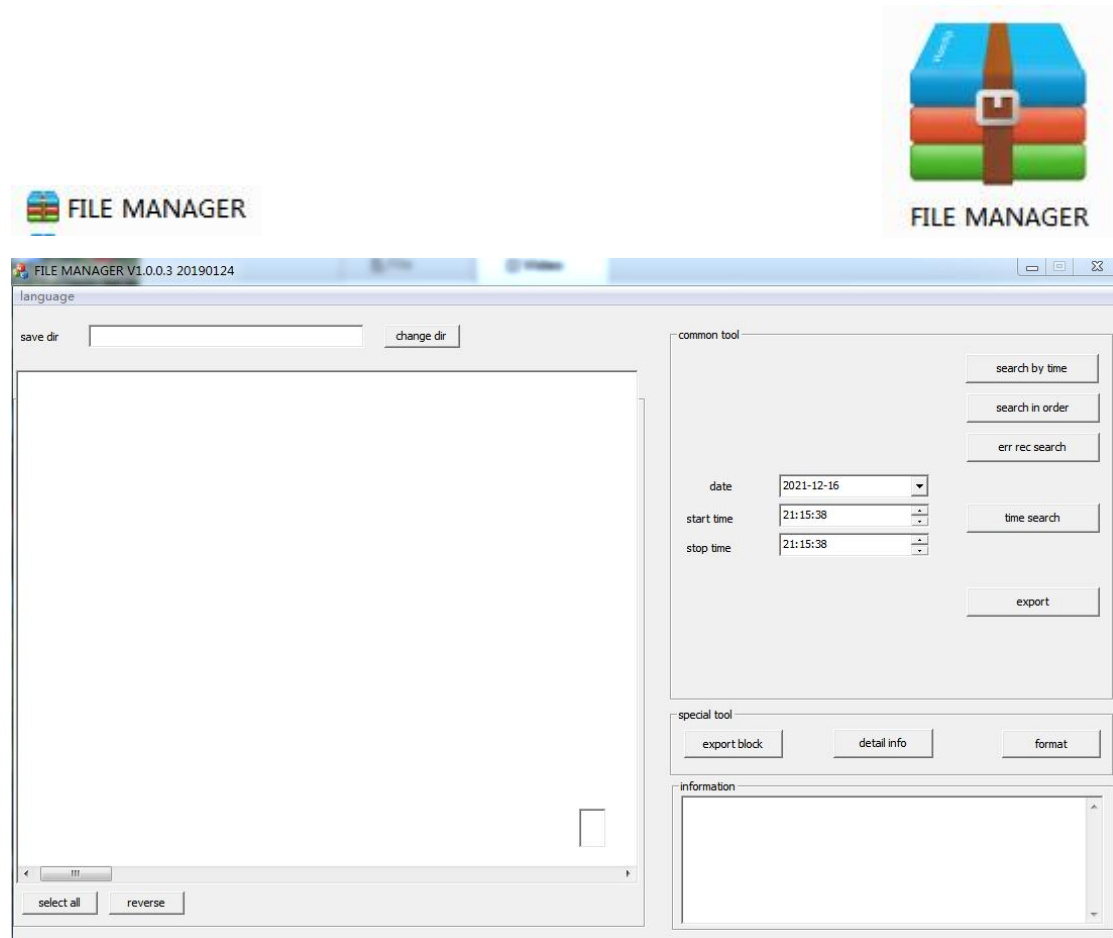

FILE MANAGER : Export video and sound -Then use - MDVRPlayer
